



## GSV2715 Product Brief

# 4 In to 1 Out HDMI 2.0/DisplayPort 1.4 to HDMI 2.0 Mixed Switch with Embedded MCU

### General Description

Gscoolink GSV2715 is a high-performance, low-power 4 In to 1 Out HDMI 2.0/DisplayPort 1.4 to HDMI 2.0 mixed switch. By integrating enhanced microcontroller based on RISC-V, GSV2715 has created a cost-effective solution that provides time-to-market advantages. The DisplayPort Receiver supports up to 32.4Gbps (HBR3, 4-lane), HDMI Receiver and HDMI Transmitter supports up to 18Gbps (TMDS, 6G/3Lane). With embedded Channel Configuration (CC), Power Delivery (PD) controller and Billboard USB 2.0 controller, GSV2715 can directly map its one receiver to USB Type-C interface, and Alternate DisplayPort for Type-C can be supported for Type-C to HDMI application. The superior architecture of GSV2715 provides economical smaller footprint solutions using QFN124, targeting applications of TV/Monitor/Sound bar/Stream box and KVM.

### DisplayPort Receiver Features

- Compliant with VESA DisplayPort 1.4a
- Compliant with HDCP 2.2/2.3 and HDCP 1.4
- Compliant with both DisplayPort and USB Type-C Alternative Mode
- Support HBR3, HBR2, HBR and RBR (8.1/5.4/2.7/1.62 Gbps)
- Flexible 1/2/4 lane Main-Link configuration
- Programmable Adaptive Equalization
- Support Full-Link Training and No-Link Training
- Support High Dynamic Range (HDR) and Dynamic/Static Metadata
- Support Adaptive Sync/FreeSync/G-Sync to HDMI VRR output conversion
- Support Audio Extraction
- Support Horizontal Blanking Expansion up to 4K120 format
- Support Forward Error Correction (FEC)
- Embedded arbitrary EDID and MCCC
- Support Spread Spectrum Clock (SSC)
- Support DSC bypass to HDMI output

### HDMI Receiver Features

- Compliant with HDMI 2.0b, HDMI 1.4b
- Compliant with HDCP 2.2/2.3 and HDCP 1.4 in repeater/receiver mode
- Data rate up to 18Gbps (TMDS 6Gbps/3 Lane)
- Programmable Adaptive Equalization

- Support High Dynamic Range (HDR) and Dynamic/Static Metadata
- Support Variable Refresh Rate (VRR), FreeSync, G-Sync
- Support ALLM
- Support Forward Error Correction (FEC)
- Embedded arbitrary EDID (up to 512 bytes)
- 5V tolerance on DDC/HPD pins

### HDMI Transmitter Features

- Compliant with HDMI 2.0b, HDMI 1.4b
- Compliant with HDCP 2.2/2.3 and HDCP 1.4
- Data rate up to 18Gbps (TMDS 6Gbps/3 Lane)
- Programmable Voltage Swing, Slew-Rate and Pre-emphasis
- Support AC-coupling on TMDS input/output
- Support Color Space Converter in TMDS mode
- Support HDR (HDR10/HDR10+/Dolby Vision/HLG)
- Support Variable Refresh Rate (VRR), FreeSync, G-Sync
- Support ALLM
- Hardware CEC Engine for Low Level protocol decoding
- 5V tolerance on DDC/HPD/CEC pins
- Support eARC Rx to I2S/SPDIF audio extraction in HDMI 2.1a

### USB Type-C Alternative Mode Features

- Compliant with USB Type-C 1.1/1.0 Specification
- Compliant with USB Power Delivery 3.0 Specification
- Programmable USB Type-C Channel Configuration function
- Support Billboard in USB 2.0

### Audio Input/Output Features


- I2S and SPDIF Audio Extraction from HDMI Rx
- I2S and SPDIF Audio Extraction from downstream ARC /eARC
- I2S/SPDIF Audio Insertion to HDMI Tx
- SPDIF/I2S/HBR/DSD/TDM Format Supported for Audio Extraction and Insertion
- SPDIF to I2S Conversion using single Bi-directional TTL bus

### System Features


- Optional External MCU (via I2C)/ Internal MCU mode
- Embedded MCU and External Flash

# GSV2715 Product Brief

- External pins of Flash QSPI interface
- External 25MHz Crystal required
- Available Pins for UART/Timer/GPIO control from embedded MCU
- Mailbox feature for external MCU access on chip
- function status
- Temperature Sensor Monitoring Circuit

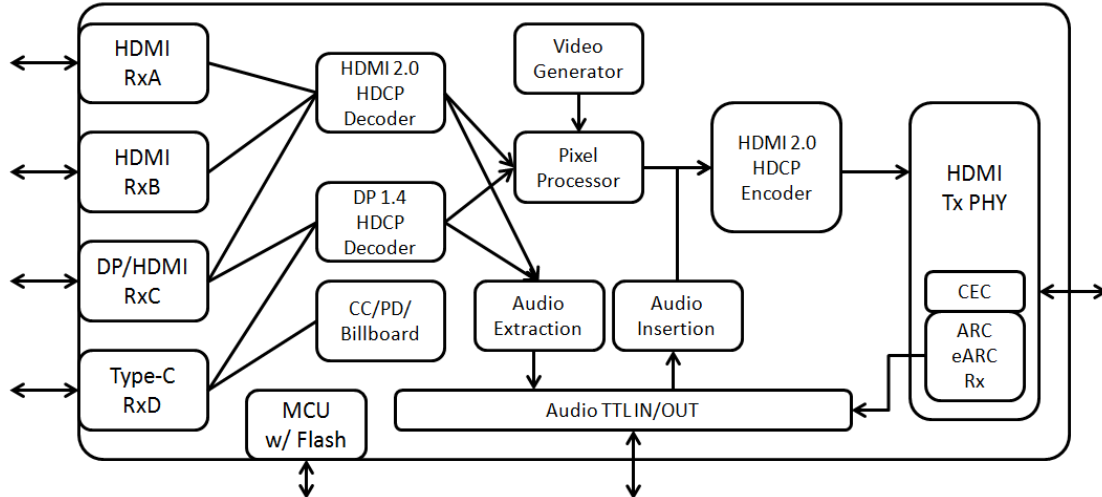


## Pin Description

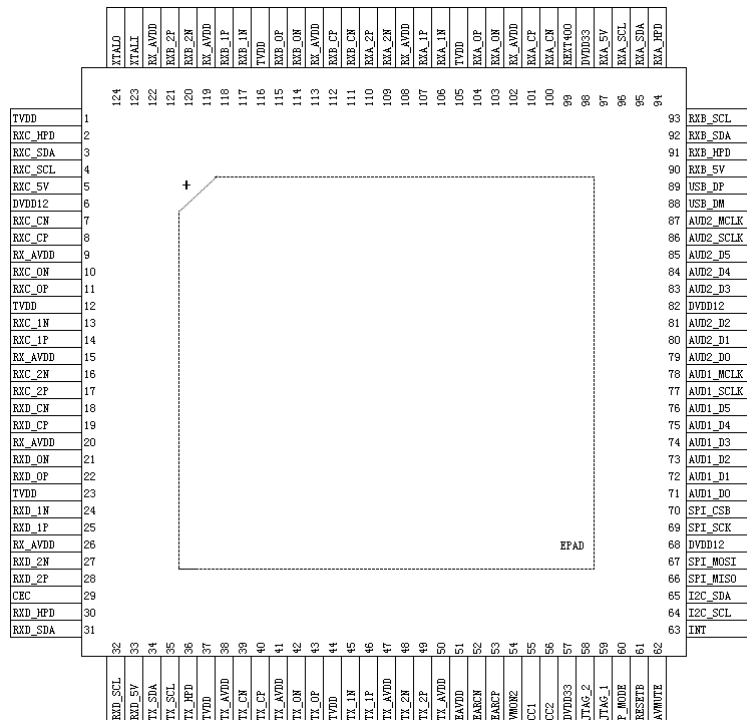

GSV2715 QFN124 Pin Diagram

Package Information

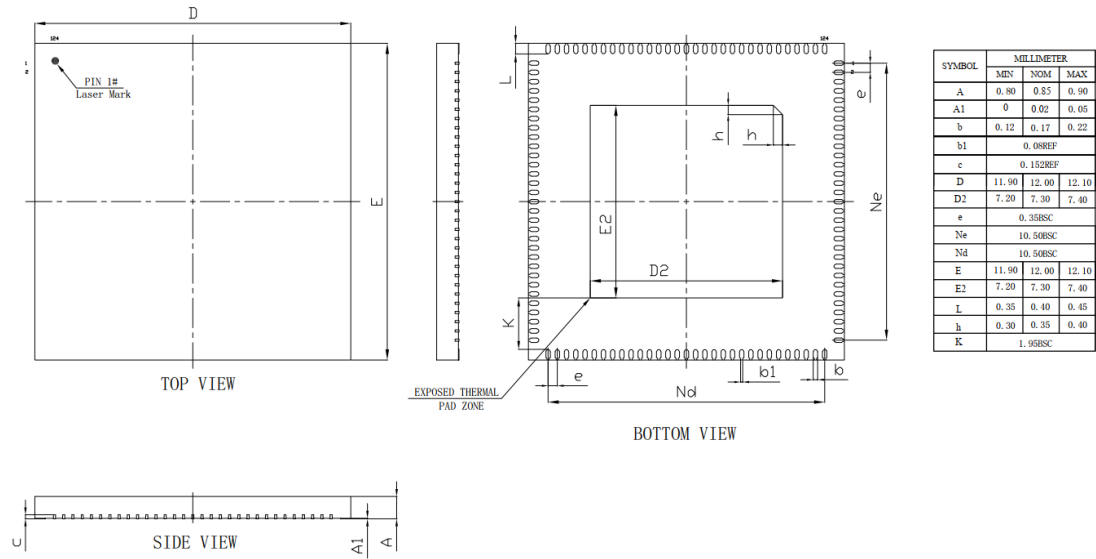

Package Dimensions (QFN124)